

## FLEXIST PROTECTOR

### PRODUCT CODE:

**SE-01**

Flexist Protector is manufactured by viscoelastic PU Foam have shock absorbing technology. The Flexist Protector has also great softness and flexibility. Therefore the Flexist Protectors also offer great ergonomics for users.


The SE-01 is a lightweight joint protector provide impact protection, delivering Type A coverage for shoulder-elbow-knee.



**SE-01**

### PRODUCT FEATURE:

| <b>Model SE-01</b>         |                              |
|----------------------------|------------------------------|
| <b>Weight</b>              | Approx. 80 g                 |
| <b>Dimensions (L/W/H):</b> | Approx. 195/154/10 mm        |
| <b>Protection Level</b>    | 1 (mean value below 35 kN)   |
| <b>Residual Force</b>      | < 21,5 kN (SE-01 Mean Value) |
| <b>Protection Area</b>     | S/E/K Type A                 |
| <b>Colour</b>              | 3 Different Colours          |

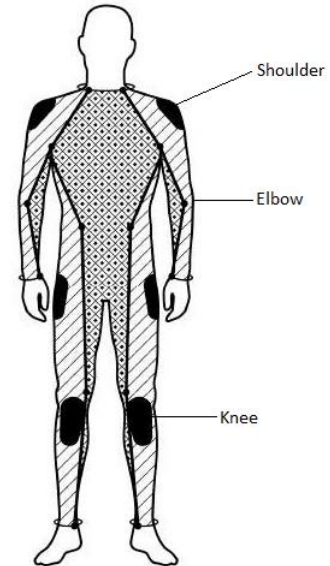

- CE certified to EN 1621-1:2012
- Flexist Protector from visco elastic foam with impact absorption values: Residual force < 35 kN.
- High Durability and Flexibility
- The protectors are lightweight.
- Level 1 in ambient and wet conditions

- Type A coverage
- SE-01 is recommended to use shoulder and elbow
- Breathable features due to the ventilation holes

## APPLICATION:

The Flexist Protector is used as an shock absorber protector in Motorcycle Garments, Military Camouflage and Police Suit.

## PACKAGING:

320 pcs each box

Box Dimensions: 40/40/60

Please store in the dry place

## CHEMICAL STABILITY

The SE-01 has chemical innocuousness test report accordance with EN-SO 13688:2013- Protective Clothing.

Flexist Protector's raw materials are supplied from raw materials approved under the REACH Regulation.

## TERMS OF USE

The protector can be removed and inserted.

The protectors can be hand-washed up to 30°C, separately.

The protectors can be also used after a few impacts unless not breaking.

Condition of use should be dry, clean and between -10°C and +40°C